


# EC001 Inline Skating Shorts

CUSTOMER: \_\_\_\_\_ VERSION: 1  
 DESIGN REQUEST NUMBER: \_\_\_\_\_ DATE: 00 / 00 / 2015  
 www.nimblewear.com sales@nimblewear.com



C Style, with Silicon Gripper

Please note that NIMBLEWEAR logo must appear on the side panels.

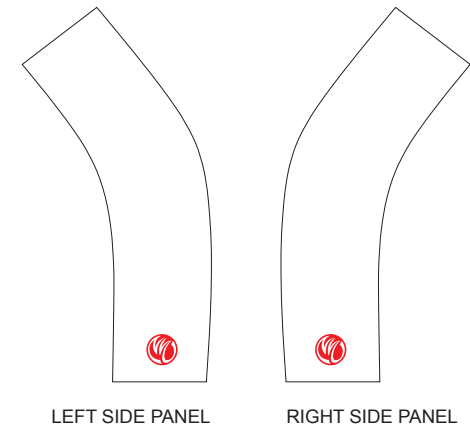

PRE-DYED LYCRA:



PANTONE® Black C



PANTONE® Red 186C



PANTONE® Dark Navy 2767 C



PANTONE® Navy Blue 2736 C



PANTONE® Light Blue 285 C



PANTONE® Cool Grey 11C



PANTONE® Green 340 C

## COLORS USED:



## FLATLOCK COLOR OPTIONS:



- This template can be edited with vector graphic software programs. Adobe Illustrator CS5 is recommended.
- All logos must be provided in vector format and all fonts must be converted into outline.
- The color on-screen may vary from the finished product. To confirm the color please refer to PANTONE® MATCHING SYSTEM FORMULA GUIDE Solid Coated.
- We will try the best to match the PANTONE® colors when printing, but exact matching cannot be guaranteed, due to variation in temperature, humidity and materials.


# EC002 Inline Skating Shorts

CUSTOMER: \_\_\_\_\_ VERSION: 1  
 DESIGN REQUEST NUMBER: \_\_\_\_\_ DATE: 00 / 00 / 2015  
 www.nimblewear.com sales@nimblewear.com



C Style, with 4.5 CM Power Band

Please note that NIMBLEWEAR logo must appear on the side panels.

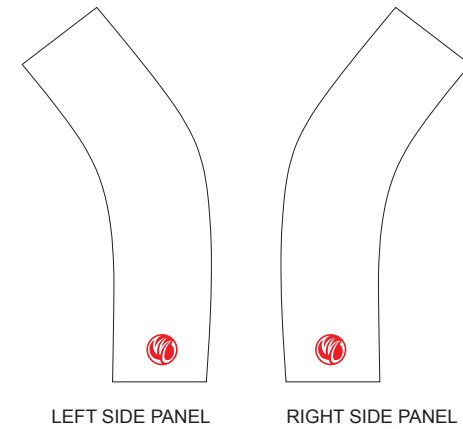

PRE-DYED LYCRA:



PANTONE® Black C



PANTONE® Red 186C



PANTONE® Dark Navy 2767 C



PANTONE® Navy Blue 2736 C



PANTONE® Light Blue 285 C



PANTONE® Cool Grey 11C



PANTONE® Green 340 C

## COLORS USED:



## FLATLOCK COLOR OPTIONS:



- This template can be edited with vector graphic software programs. Adobe Illustrator CS5 is recommended.
- All logos must be provided in vector format and all fonts must be converted into outline.
- The color on-screen may vary from the finished product. To confirm the color please refer to PANTONE® MATCHING SYSTEM FORMULA GUIDE Solid Coated.
- We will try the best to match the PANTONE® colors when printing, but exact matching cannot be guaranteed, due to variation in temperature, humidity and materials.